

Eaton 93PM UPS 30-50 kW

Eaton 93PM UPS

Class-leading energy efficiency
with minimal operating costs



EATON

Powering Business Worldwide

The Eaton 93PM all-in-one solution

Introducing the Eaton 93PM UPS, helping you to combat the costs of energy and the ever-increasing power demands of IT infrastructure. Featuring industry-leading operating efficiency of 96.7% and world-class intelligent software solutions, the 93PM is the surest way to secure the continuity of your mission-critical applications. All this compactly in 0.5 m².

Securing the continuity of your mission-critical applications

Your first step towards maximised power usage effectiveness and minimised total costs of ownership (TCO)

- 96.7% efficiency in double conversion
- > 99% efficiency with Energy Saver System (ESS)

Maximal power and energy density in a minimal 0.5 m² footprint

- Standard 10-20 minutes full load runtime with internal batteries

World class intelligent software solutions

- Intelligent Power Manager® allows you to monitor and manage your UPS system as an integral part of power infrastructure
- Plugs into leading virtualisation management systems like VMware vCenter, Microsoft SCVMM and Citrix XenCenter



The Eaton 93PM UPS occupies only 0.5 m² floorspace

Intuitive user interface

- Display shows power quality, energy consumption and efficiency trends
- Data logging feature allows easy measurement, monitoring and managing

The Eaton 93PM UPS is an all-in-one solution that minimises your total costs of ownership. Our ethical standards give you the assurance that we deliver exactly what we promise in terms of performance, and our partnerships help you to achieve more efficient data centres.



Features and benefits

The Eaton 93PM UPS provides 96.7% energy efficiency in double conversion

On-line double conversion topology ensures the UPS output is not affected by any abnormalities in the utility power and keeps critical load equipment protected against all common power problems.

With Eaton 93PM UPS, modern multi-level converter technology ensures that in double conversion no energy is wasted and the UPS operating efficiency is top-of-market 96.7% resulting in significant savings in operational costs.

Energy Saver System delivers superior > 99% efficiency

Even small increases in UPS efficiency can quickly translate into thousands of dollars, realised in more real power and lower cooling costs. Energy Saver System enables > 99% efficiency across the typical UPS operating range.

In ESS, the load is powered securely through the static bypass line with double conversion available on-demand with typical 2 ms transition time in the event of any abnormality on supply source. When operating in ESS mode, the load is protected with inherent surge suppression.

When utility power quality is high, ESS can reduce UPS power losses by 75% as it runs on double conversion only when needed.

More power in a small footprint

The Eaton 93PM UPS is a high power density solution. In a footprint of just 0.5 m², it can provide full rated power and standard backup time with internal batteries.

Advanced battery management

Eaton's advanced charging algorithm prolongs battery service life significantly compared to traditional charging methods. Automatic battery tests ensure any defects on batteries are detected and any failed blocks replaced on time. Battery health data is available for viewing easily through the display. By being able to monitor the condition of batteries and view a history log of test data, system maintenance can be better planned and scheduled ahead.

Accessories and options

A variety of options and accessories are available to further tailor the UPS solution to meet your specific needs:


UPS options

- Variety of connectivity card options
- Environmental Monitoring Probe

Accessories

- Extended runtimes with line-and-match external battery cabinets
- External maintenance bypass (wall mountable)
- System Parallel Modules
- Variety of other external switchgear and power distribution solutions

Eaton 93PM Efficiency in Double Conversion and ESS

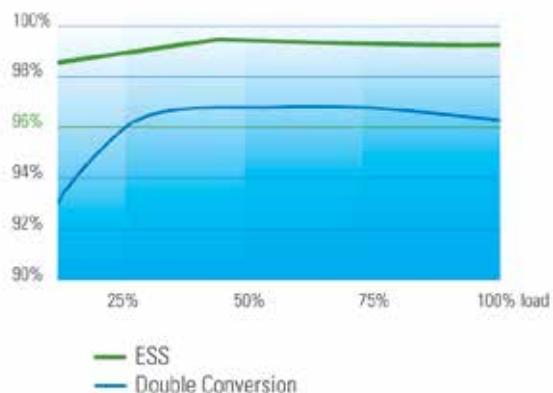

PREMIER POWER QUALITY FOR YOUR

- Virtualised data centres
- Mission-critical applications
- IT infrastructure

Software and connectivity

Intelligent Power Software (IPP/IPM)

The Eaton 93PM UPS is designed for the most advanced IT environments, and it comes with interfaces for Web and SNMP as standard.

Our Intelligent Power Manager® software is a productivity tool for administrators of several power devices and shutdown applications.

Intelligent Power Manager® plugs into leading virtualisation management systems like VMware vCenter, Microsoft Systems Center and Citrix XenCenter, consolidating power information to the same tool that is used to monitor and manage physical and virtual servers, storage and networks. In case of power failure, it can also trigger actions like live migration of virtual machines, controlled shutdown or disaster recovery.



Inside the Eaton 93PM UPS

Communications and connectivity

Three MiniSlots for additional connectivity hardware

Built-in device and host USB

Five alarm inputs and dedicated EPO

Alarm relay output (more available as option)

Battery start

Input switchgear

System static bypass switch

Integrated maintenance bypass switch (MBS)



Input, output bypass and battery terminals

Eaton's heritage in industry-leading UPS design and production



For more than 50 years, Eaton has been safeguarding the critical systems of businesses across the globe. Whether protecting a single desktop or the largest data centre, Eaton solutions provide clean, uninterrupted power to keep mission-critical applications working.

We offer a comprehensive range of environmentally-sensitive, efficient, reliable UPSs, surge protective devices, power distribution units (PDUs), remote monitoring, meters, software, connectivity, enclosures, airflow management and professional services.

We work with IT and facilities managers to effectively manage power in virtually every business segment, including data centres, retail outlets, healthcare organisations, governmental agencies, manufacturing firms, broadcasting companies, financial institutions, and a wide variety of other applications.

Our solutions provide the power to make a difference, helping you achieve your business goals while maintaining environmentally sustainable enterprises.

A world-class support structure.

As an industry-leading UPS provider, at Eaton we are constantly working to ensure that our service standards meet your needs precisely. Our trained service team is on hand 24/7 to minimise risks by detecting and addressing problems before they happen.

We confidently guarantee the experience and know-how of our servicing resources to provide a dedicated support package which helps to ensure your equipment is running safely, reliably, sustainably and energy-efficiently at all times.

To find out more, please visit

www.eaton.com/93PM



“ Committed to creating and maintaining powerful customer relationships based on a foundation of excellence.”

Eaton 93PM UPS Technical Specifications

General		Output			
UPS output power rating (1.0 p.f.)	30, 40, 50 kW	Output wiring	3 ph + N + PE		
Efficiency in double conversion mode	96.7%	Nominal voltage rating (configurable)	220/380, 230/400, 240/415 V 50/60 Hz		
Efficiency in Energy Saver System (ESS)	99%	Output UTHD	< 1% (100% linear load) < 5% (reference non-linear load)		
Field upgradeable	Yes, up to 50 kW	Output power factor	1.0		
Inverter/rectifier topology	Transformer-free IGBT with PWM	Permitted load power factor	0.8 lagging – 0.8 leading		
Audible noise	55 dBA at 75% load 60 dBA at 100% load	Overload on inverter	10 min 102-110% 60 sec 111-125% 10 sec 126-150% 300 ms > 150%. On battery mode 300 ms > 126%		
Altitude (max)	1000 m without derating (max 2000 m)	Overload when bypass available	Continuous < 125%, 10 ms 1000%		
Input		Accessories			
Input wiring	3 ph + N + PE	MiniSlot connectivity (Web/SNMP, ModBus/Jbus, Relay)			
Nominal voltage rating (configurable)	220/380, 230/400, 240/415 V 50/60 Hz	Communications			
Input voltage range	High +20% rectifier input, 10% bypass input Low -15% at 100% load, -40% at 50% load without battery discharge	MiniSlot	3 communication bays		
Input frequency range	40-72 Hz	Serial ports	Built-in host and device USB		
Input Power Factor	0,99	Relay inputs/outputs	5 relay inputs and dedicated EPO 1 relay output		
Input ITHD	< 3%	Compliance with standards			
Soft start capability	Yes	Safety (CB certified)	IEC 62040-1		
Internal backfeed protection	Yes	EMC	IEC 62040-2, EMC Category C3		
Battery		Performance	IEC 62040-3		
Battery type	VRLA				
Charging method	ABM technology or Float				
Battery nominal voltage (lead-acid)	432 V (36 x 12 V, 216 cells)				
Charging current maximum	22 A				
Battery start capability	Yes				
Standard UPS with internal batteries					
Part Number	Description	Rating	Full-Load Runtime	Dimensions(W x D x H)mm	Weight(kg)
9106-1203-00P	93PM-30(50)-MBS-BB-6 x 36	30KW	20min	560 x 914 x 1876	890
9106-1204-00P	93PM-40(50)-MBS-BB-6 x 36	40KW	15min	560 x 914 x 1876	890
9106-1205-00P	93PM-50(50)-MBS-BB-6 x 36	50KW	10min	560 x 914 x 1876	890
Standard UPS without battery kit and batteries					
Part Number	Description	Rating	Full-Load Runtime	Dimensions(W x D x H)mm	Weight(kg)
9106-6294-00P	93PM-30(50)-MBS	30KW	N.A.	560 x 914 x 1876	288
9106-7296-00P	93PM-40(50)-MBS	40KW	N.A.	560 x 914 x 1876	288
9106-8205-00P	93PM-50(50)-MBS	50KW	N.A.	560 x 914 x 1876	288
Option - Battery Kit					
Part Number	Description				
HPO-1040338	Internal battery trays & cables for 6-strings 12V 9Ah battery, without batteries.				

SINGAPORE
Tel : +65 6825 1684
Fax : +65 6825 1689
EatonSEA@eaton.com
www.eaton.com/93PM

INDONESIA
Tel : +62 21 2949 9000
Fax : +62 21 2949 9001

MALAYSIA
Tel : +603 7804 3618
Fax : +603 7803 6193

THAILAND
Tel : +66 2575 0530
Fax : +66 2575 1579

VIETNAM
Hanoi
Tel : +84 4 3936 5303
Fax : +84 4 3936 5307

Ho Chi Minh
Tel : +84 8 6255 6737
Fax : +84 8 6255 6801

Eaton is the trade name, trademark, and/or service mark of Eaton Corporation or its subsidiaries and affiliates.